

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

Docket No.: 21854-00040-US  
(PATENT)

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Patent Application of:  
Otto R. Eppinger

Application No.: Not Yet Assigned

Confirmation No.:

Filed: Concurrently Herewith

Art Unit: N/A

For: TRANSFER HEAT PRESS

Examiner: Not Yet Assigned

**CLAIM FOR PRIORITY AND SUBMISSION OF DOCUMENTS**

MS Patent Application  
Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Dear Sir:

Applicant hereby claims priority under 35 U.S.C. 119 based on the following prior foreign applications filed in the following foreign countries on the dates indicated:

<u>Country</u>	<u>Application No.</u>	<u>Date</u>
Australia	2003902747	June 3, 2003
Australia	2003906205	November 12, 2003

In support of this claim, a certified copy of each said original foreign application is filed herewith.

Application No.: Not Yet Assigned

Docket No.: 21854-00040-US

Applicant believes no fee is due with this response. However, if a fee is due, please charge our Deposit Account No. 22-0185, under Order No. 21854-00040-US from which the undersigned is authorized to draw.

Dated: April 1, 2004

Respectfully submitted,

By 

Morris Liss

Registration No.: 24,510

CONNOLLY BOVE LODGE & HUTZ LLP

1990 M Street, N.W., Suite 800

Washington, DC 20036-3425

(202) 331-7111

(202) 293-6229 (Fax)

Attorney for Applicant



**Patent Office  
Canberra**

I, JULIE BILLINGSLEY, TEAM LEADER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. 2003906205 for a patent by REEFDALE PROPRIETARY LIMITED as filed on 12 November 2003.

WITNESS my hand this  
First day of March 2004

A handwritten signature in cursive script that reads "J. Billingsley".

JULIE BILLINGSLEY  
TEAM LEADER EXAMINATION  
SUPPORT AND SALES

AUSTRALIA  
*Patents Act 1990*

## **PROVISIONAL SPECIFICATION**

**200390      filed 12<sup>th</sup> November 2003**

**Invention Title : Transfer Heat Press**

**Applicant: Reefeldale Proprietary Limited**  
**[A C N 005 761 268 ]**

**Inventors: Otto Richard Eppinger**

**The invention is described in the following statement:**

## Transfer Heat Press

This invention relates to a heat press for transfer printing of garments particularly in association with a rotary screen printing machine.

### Background to the Invention

- 5 Heat presses for transfer printing are known. USA patent 4386993 discloses a press in which the upper platen moves relative to the lower platen by way of a cam and rocking member.
- USA patent 3979248 discloses a decal press with a motor driven upper platen.
- USA patent 5435883 discloses a hand operated press with adjustment for the gap  
10 between the platens.
- USA patent 5474633 discloses a press with a pneumatic engager to press the upper platen onto the lower platen and a timer mechanism.
- USA patent 4963208 discloses a system for applying a decorative device using a swingable upper platen.
- 15 Often transfers are applied as part of a process of screen printing an ornamental pattern onto a garment. The heat press is positioned relative to one print station of a rotary printing machine of the type described in USA patents 3795189 and 5031527 which are examples of the type of machines used in screen printing garments. The garment is supported on a pallet of the screen printing machine and  
20 the pallet arm swings the pallet with the garment into position between the upper and lower platens of the heat press.
- In the prior art heat presses the pressing force is applied by the upper platen and the lower platen may not be at an appropriate height to properly support the pallet arm. The forces applied may damage the pallet arm or bend it out of shape  
25 sufficient to impede the printing performance of the machine.
- It is an object of this invention to overcome this problem.

### Brief Description of the Invention

To this end the present invention provides a transfer heat press which includes

- 30 a) a platen frame mounted on a support and moveable vertically relative to said support
- b) an upper platen mounted to the platen frame
- c) a lower platen mounted on the platen frame the lower platen being moveable toward the upper platen

- d) control means which allows the frame to move downwardly when the lower platen is raised toward the upper platen.

The lower platen applies a force to the underside of the pallet arm of a screen printing machine which results in the platen frame being allowed to move

- 5 downwardly. This downward movement is preferably guided and cushioned by a pneumatic or hydraulic spring. This arrangement means that the force on the pallet arm is equal to the weight of the platen frame less the upthrust of the pneumatic or hydraulic spring and the risk of damage to the pallet arm is minimized. The pressure applied by the upper platen to a garment is counterbalanced by the  
10 upward force exerted by the lower platen.

Preferably the platen frame is C shaped and the upper platen is fixed to the top of the C and the lower platen is able to be raised toward the upper platen. The C frame and the upper and lower platens are supported by a support frame which may include hydraulic or pneumatic lifting rams to initially place the C frame

- 15 around the pallet of the screen printing machine. Once the heat press is actuated the lower platen is raised to contact the pallet arm and the C frame is allowed to slide downwardly so that the upper platen contacts the garment on the pallet. The upper platen is heated to assist the transfer printing.

## 20 **Detailed Description of the Invention**

A preferred form of the invention is illustrated in the enclosed drawings in which Figure 1 is a rear perspective view of the heat press of this invention;

Figure 2 is front perspective view of the heat press of this invention;

Figure 3 is a schematic side elevation of the invention; and

- 25 Figure 4 is a schematic rear view of the invention.

The embodiment illustrated is a mobile heat press station which may be used with a rotary or oval screen printing machine of the kind described in USA patents 5031527, 5595113, 5678482 and 5913264 or any other printing machine with a cantilevered pallet.

- 30 The machine consists of a wheeled base 10 mounted on which is the support frame 11. The C frame 12 is mounted for vertical sliding movement on the support frame 11 and carries the heater platen 14 which is the upper platen and the pallet support or lower platen 15. Location guides 18 are adapted to locate the heat

press against the print station of a print machine so that each pallet will be aligned with the upper platen 14 and lie between the platens 14 and 15. The heat press includes a micro controller and controls 17 that can be programmed as to the duration and temperature of the transfer printing operation. As shown in more detail in figures 3 and 4 the heating platen 14 is fixed to the upper portion of the C frame 12 by the attachment means 21. During operation of the heating press of this invention, the heating platen 14 does not move relative to the C frame 12. Attached to the C frame is the press cylinder 24 which is adapted to raise and lower the pallet support platen 15. The swivel hub 22 allows for relative movement between the press cylinder shaft and the pallet support 15.

The C Frame 12 is supported by the levelling cylinder 28 which in turn is fixed by the frame 25 to the base 10. The guide rails 26 sliding within the bearings 27 ensure that the C frame slides vertically in response to the pressure in the levelling cylinder 28. The cylinder 28 allows the C frame 12 and its attachments the upper platen 14 and the lower platen and its press cylinder 24 to float downwardly as the lower platen is raised. The levelling cylinder 28 may be an hydraulic cylinder but is preferably a pneumatic ram.

In operation the levelling cylinder 28 is pressured to ensure that the pallet of the rotary screen printing machine is located underneath the platen 14 and above the pallet support 15. When the pressing operation commences the press cylinder raises the lower pallet 15 so that it abuts and supports the pallet and pallet arm. The air in the pneumatic cylinder 28 is allowed to bleed so that the cylinder 28 acts as a spring and takes the weight of the C frame 12 and its attachments. This means that the full weight of the C frame 12, the platens 14 and 15 is countered by the levelling cylinder 28 while the pallet is supported by the press cylinder 24. By this arrangement damage to the pallet arm of the screen printing machine is avoided.

The sequence of operation of the heat press when used in conjunction with a rotary screen printing machine is :

1. The pallet of the rotary screen printing machine swings into position between the top (heated) platen and bottom (support) platen
2. the pallet is raised toward the heated platen by the rotary screen printing machine mechanism



3. the lower platen is raised to contact the pallet
  4. the bleeding of air from cylinder 28 means that the frame and top platen are counterbalanced by the lower platen
  5. heat is applied to the garment on the platen by the top platen which is in contact with the garment on the pallet
  6. the bottom platen is lowered
  7. the pallet is lowered
  8. the pallet swings out and the next pallet swings in to repeat the cycle.
- 10 Those skilled in the art will realize that other embodiments of the invention are possible without departing from the essential principle of this invention.

**CLAIMS**

1. A printing machine arm and heat press combination in which the printing machine has a pallet arm for supporting an article to be printed and the heat press includes
  - 5       a) a platen frame, adapted to encompass the pallet arm, mounted on a support and moveable vertically relative to said support
  - b) an upper platen, adapted to lie above the pallet arm, mounted to the platen frame
  - c) a lower platen mounted on the platen frame the lower platen being
  - 10       d) positioned below the pallet arm upwardly moveable to abut the pallet arm
  - d) control means which allows the frame to move downwardly when the lower platen is raised.
2. A transfer heat press which includes
  - 15       a) a platen frame mounted on a support and moveable vertically relative to said support
  - b) an upper platen mounted to the platen frame
  - c) a lower platen mounted on the platen frame the lower platen being
  - d) moveable toward the upper platen
  - 20       d) control means which allows the frame to move downwardly when the lower platen is raised toward the upper platen.
3. A transfer heat press as claimed in claim 2 in which the platen frame is a C shaped frame.
- 25       4. A transfer heat press as claimed in claim 2 in which the platen frame is supported by a pneumatic or hydraulic ram.
- 30       5. A transfer heat press as claimed in any preceding claim in which the lower platen reciprocates.

**ABSTRACT**

A transfer heat press which is intended for use with a rotary screen printing machine, incorporates a C shaped frame mounted on a support and moveable vertically relative to said support. A heater platen is mounted to the top of the C frame. A lower platen adapted to support the pallet of the rotary screen printing machine is mounted on the lower part of the C frame. The lower platen is moveable toward the upper platen. The lower platen applies a force to the underside of the pallet arm of a screen printing machine which results in the platen frame being allowed to move downwardly. This downward movement is guided and cushioned by a pneumatic or hydraulic spring. This arrangement means that the force on the pallet arm is equal to the weight of the platen frame less the upthrust of the pneumatic hydraulic ram. This reduces the risk of damage to the pallet arm.

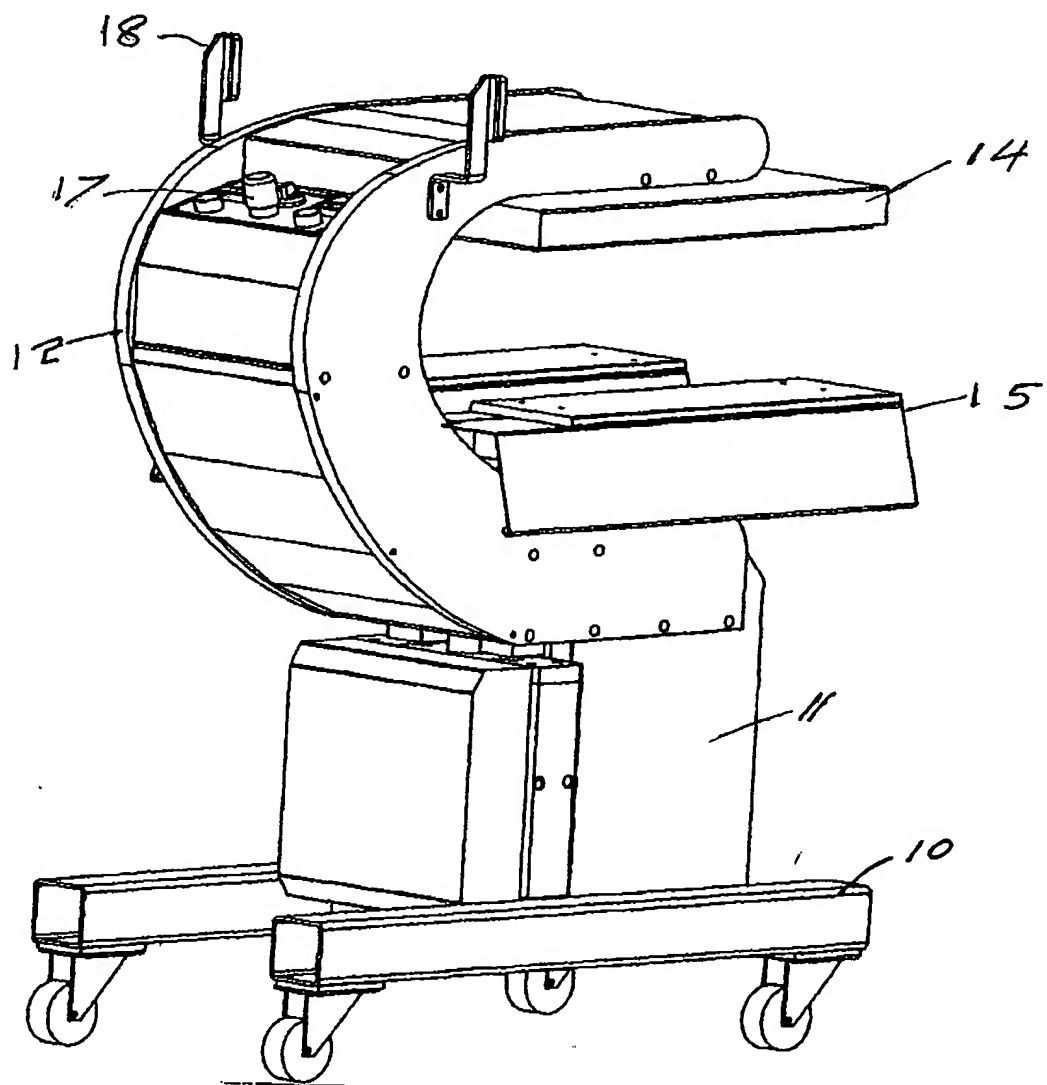


FIG 1

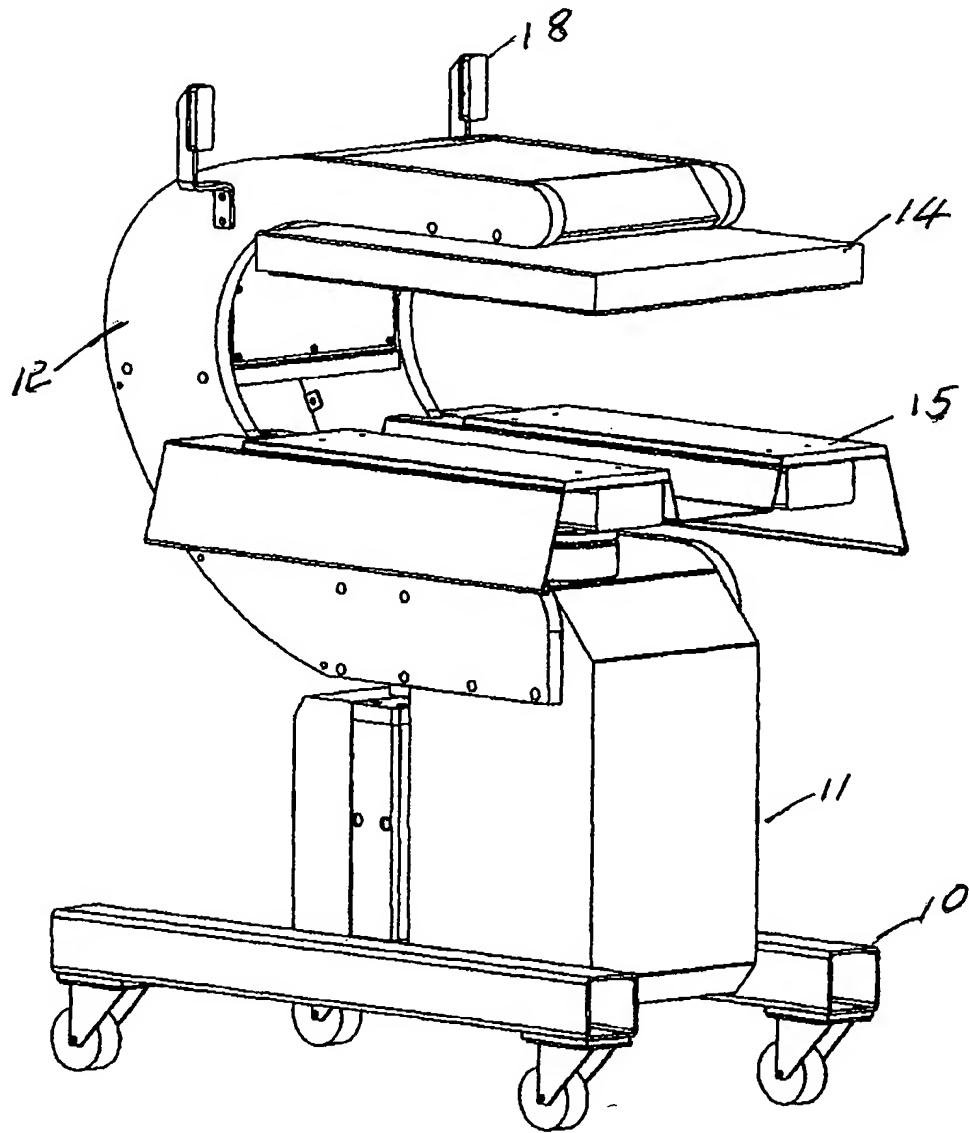


FIG 2

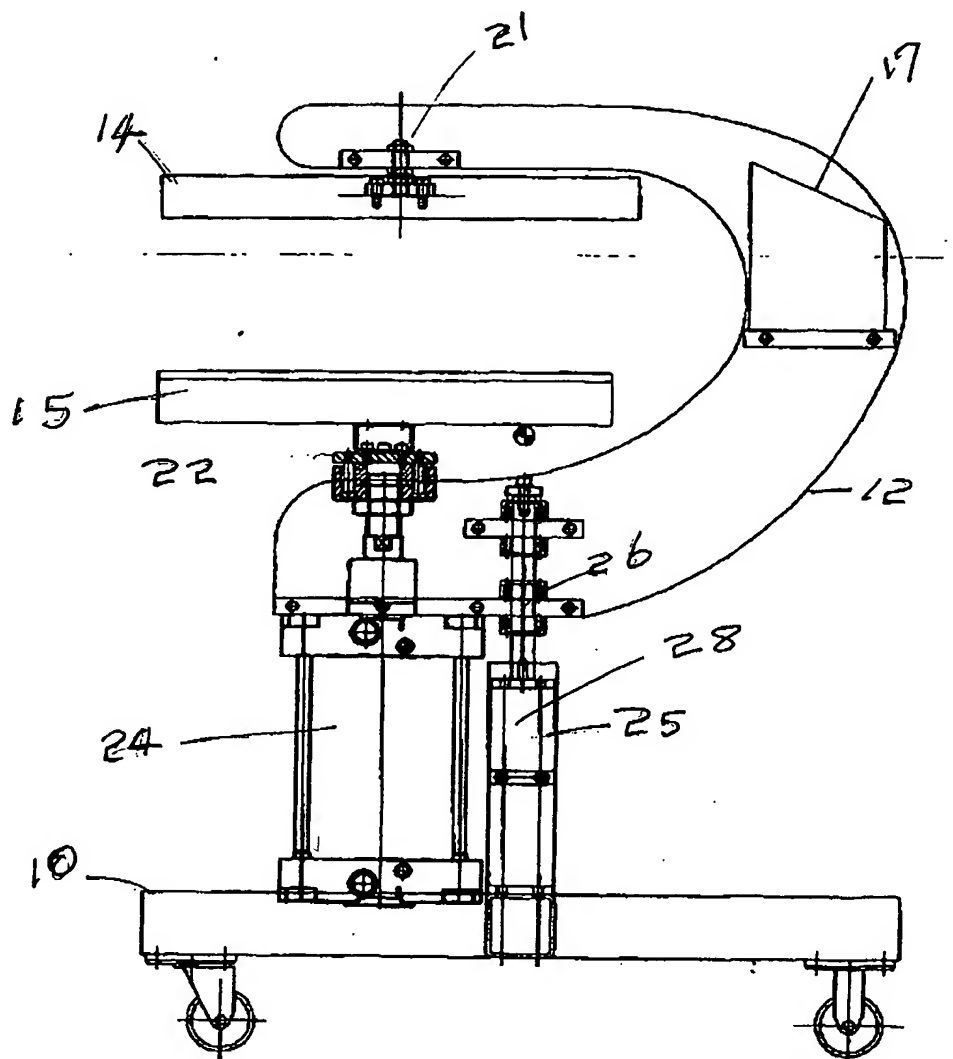


FIG 3

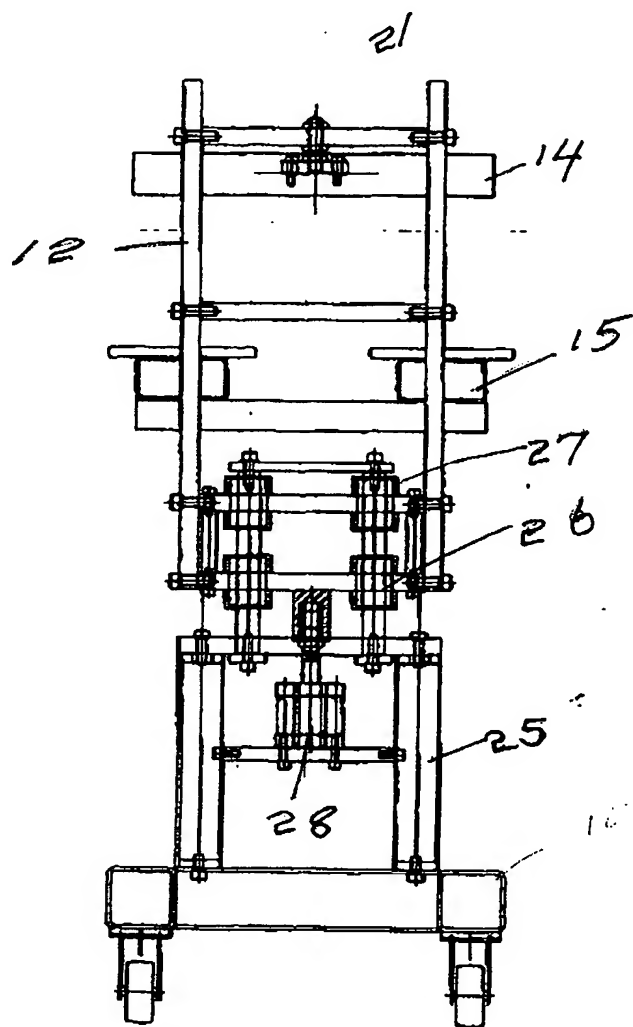


FIG 4